

SKID STEERS

■ 2054 ■



mustangmfg.com

PREPARE to dig, load and haul



- Operating capacity of 1,750 lbs. with optional counterweight provides exceptional lifting and loading capabilities.

- Breakout forces up to 5,000 lbs. provide extra muscle for tough jobs.




- Three different control configurations, including dual lever with foot controls, dual lever with hand controls, and T-bar with hand controls.

- A wide variety of attachments are powered by strong, auxiliary hydraulics with standard flat-faced couplers.

- Sturdy Level I-certified ROPS/FOPS structure provides protection, yet allows an unobstructed view to the attachment and surrounding work areas.

SPECIFICATIONS

| | 2054 | |
|----------------------------------|--|--------------------------|
| DIMENSIONS | A. Overall Operating Height - Fully Raised (mm) | 146.5" (3721) |
| | B. Height to Hinge Pin - Fully Raised (mm) | 116" (2946) |
| | C. Overall Height to Top of ROPS (mm) | 77.7" (1973) |
| | D. Ground Clearance to Chassis (mm) | 7.8" (197) |
| | E. Overall Length with Bucket (mm) | 125.5" (3188) |
| | F. Overall Length without Bucket (mm) | 97" (2448) |
| | G. Wheelbase (mm) | 38.5" (978) |
| | H. Dump Reach at Full Height (mm) | 24" (610) |
| | I. Bucket Rollback at Ground | 28° |
| | J. Dump Angle | 34° |
| | K. Overall Width (mm) | 60.7" (1542) |
| | L. Bucket Width (mm) | 61.5" (1562) |
| | M. Clearance Circle - Rear (mm) | 59.3" (1506) |
| | N. Clearance Circle - Front without Bucket (mm) | 45.8" (1162) |
| | O. Clearance Circle - Front with Bucket (mm) | 74.5" (1892) |
| | P. Seat to Ground Height (mm) | 34.8" (884) |
| | Q. Rollback at Full Height | 100° |
| | R. Dump Height (mm) | 92" (2337) |
| | S. Departure Angle | 26° |
| Standard Specification Tire Size | 10.00x16.5 HD | |
| ENGINE | Make | Yanmar |
| | Model | 4TNV88-Tier III |
| | Power (kW) @ rpm | 47 hp (35) @3000 |
| | Displacement (L) | 133.6 cu.in. (2.19) |
| | Maximum Torque (Nm) @ rpm | 106 ft.-lbs (145) @ 1680 |
| HYDRAULIC SYSTEM | Auxiliary Hydraulics - Standard (L/min) | 18 gpm (68.1) |
| | High-Flow Hydraulics - Optional (L/min) | 28 gpm (106) |
| | Filtration | 7 micron |
| | System Relief Pressure (bar) | 2850 psi (197) |
| | Reservoir Capacity (L) | 11.5 gal. (43.5) |
| CAPACITIES /WEIGHT | Rated Operating Capacity ^A (kg) | 1650 lbs. (748) |
| | With Optional Counterweight ^A (kg) | 1750 lbs. (794) |
| | Tipping Load (kg) | 3300 lbs. (1497) |
| | Fuel Tank (L) | 14.3 gal. (54.1) |
| | Travel Speed - Maximum (km/hr) | 6.8 mph (10.9) |
| | Operating Weight ^B - Approximate (kg) | 6080 lbs. (2758) |

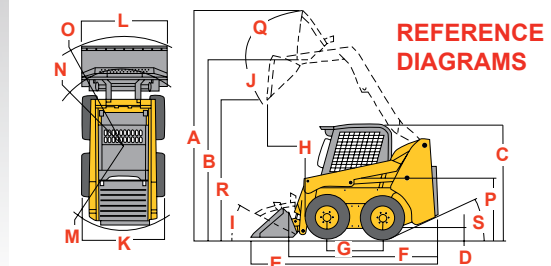

West Bend, WI USA
Tel: 262-334-9461
Fax: 262-338-7517

For more information on Mustang equipment, call our literature hotline at **800-628-0491** or visit our website: **mustangmfg.com**

A Per SAE J818, SAE J732, and ISO 14397
B Unit weight with standard bucket, 175 lbs. (79 kg) operator and full fuel tank