



NR-25B

PORTABLE RAIL IMPACT WRENCH

battery-powered



| Maximum torque Nm (ft lbs) | Power supply | Dimensions mm (inches) | | | Weight with batteries kg (lbs) |
|-------------------------------|--------------|------------------------|------------|------------|--------------------------------------|
| | | A | B | C | |
| 2700 (2000) | 36V | 728 (28.7) | 437 (17.2) | 307 (12.1) | 20,5 (45,2) |

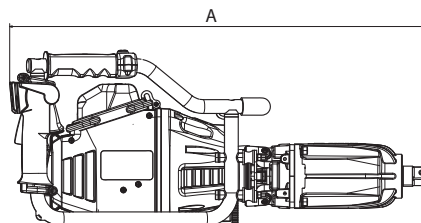

Features

- With 2700 Nm of torque and dual drive for vertical and horizontal use, the NR-25B is the most powerful and versatile impact wrench in the industry.
- The IP44M rain proofing and vibration damping system make it a safe solution that guarantees high performance.
- Powered by 2 batteries 36V - 6.2 Ah Li-Ion in parallel to ensure an optimal power-autonomy ratio
- Equipped with powerful LED lights, operators will be able to work more efficiently at night and in tunnels.
- Low-impact vibrations for operator hand/arm protection, using dampers between the handles and motor unit
- Easily visible and intuitive front control panel with display and 5-levels torque selector and inversion movement push button
- The brushless motor is maintenance free. Small footprint, maximum torque and power available.
- It can be used both in portable mode and in combination with the CS-EU support trolley with the aid of the specific interface KIT.
- The double charger allows you to charge both batteries at the same time in 90 minutes.

Sale setup:

- battery **CB3662L** 36V - 6.2Ah Li-Ion (2 pz)
- Battery charger*
- retaining spring **CLIP-NR** 47-57 mm (3 pz)
- retaining spring **CLIP-NR57** 57-67 mm

Accessories on request:

- interface kit **KCS-NR25** for vertical use for CS-EU
- interface kit **KHOR-NR25** for horizontal use for CS-EU
- metal case **VAL-NR-25B** for impact wrench
- plastic case **VAL-P20** for bushing with mould
- protective cover **027-NR**

| Impact wrench Type | Plug Type | Supplied Battery Charger Type* |
|--------------------|-------------|--|
| NR-25B | PLUG EU | ASC145DUO-EU with EUROPEAN plug |
| NR-25BE | PLUG UK | ASC145DUO-UK with UK plug |
| NR-25BA | PLUG USA/CA | ASC145DUO-USA/CA (115V) with USA/CANADA plug |

